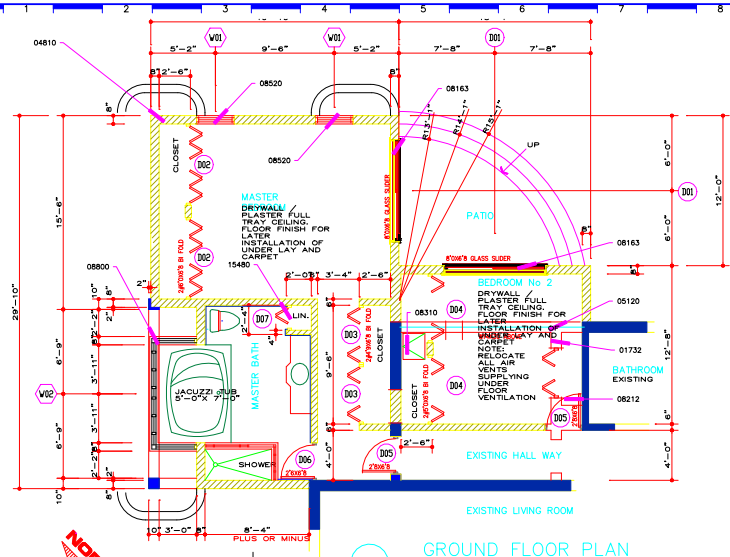

GROUND FLOOR PLAN

SCALE: 1/4" = 1'-0"

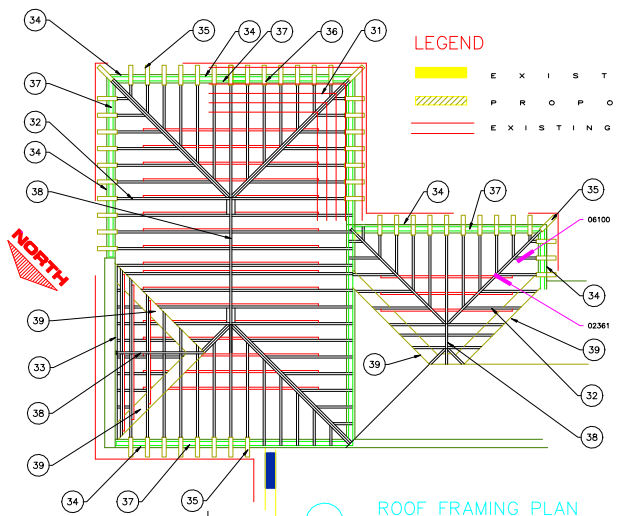

ROOF FRAMING PLAN

SCALE: 1/4" = 1'-0"

ELECTRICAL KEY

- 20 AMP DUPLEX RECEPTACLE
- AS ABOVE, SPLIT WIRED
- 220 VOLT RECEPTACLE
- FLOOR RECEPTACLE
- GFCI GROUND FAULT CIRCUIT INTERRUPTER
- SINGLE POLE SWITCH
- 3 WAY SWITCH
- DIMMER SWITCH
- LIGHTED SWITCH
- CEILING MOUNTED LIGHT
- WALL MOUNTED LIGHT
- RECESSED LIGHT
- FLORESCENT LIGHT
- TELEPHONE OUTLET
- CABLE OUTLET
- J.B. JUNCTION BOX
- BREAKER PANEL
- METER
- SMOKE/HEAT DETECTOR
- BELL
- PULL STATION
- M.H. MOUNTING HEIGHT 18"
- AUTO DOOR OPENER

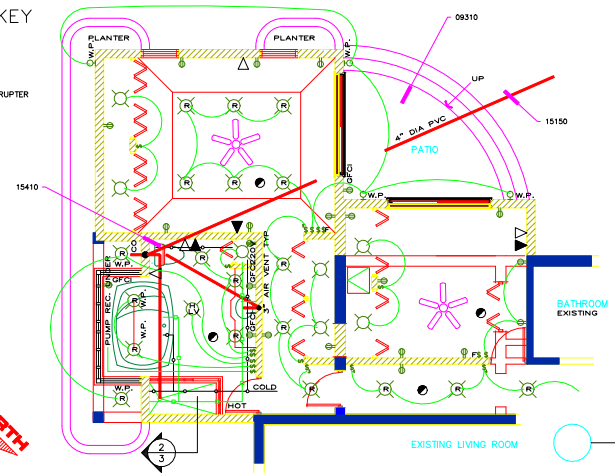

GROUND FLOOR PLAN ELECTRICAL

SCALE: 1/4" = 1'-0"

31 BERMUDA LAPPED SLATE ROOF ON 1"X 2" PITCH PINE LATH FIXED TO RAFTER WITH 2" GALV. NAILS

32 2"X 8" PITCH PINE RAFTERS @ 16" O/C WITH PITCH PINE 2"X 6" COLLAR TIES BOLTED TOGETHER WITH 2 No 1/2" DIA. GALV. BOLTS EACH SIDE (TYPICAL)

33 RAFTER SUPPORT FIXED TO CONCRETE BLOCK WITH ANCHOR BOLTS @ 18" O/C PROVIDE NEOPRENE PAD BETWEEN CONCRETE AND SUPPORT 1 1/2" CLEARANCE

34 8"X 8" DEEP CONTINUOUS CONCRETE BELT REINFORCED WITH 2 No T 12 GALVANIZED STEEL BARS

35 3"X 4" WOL. PITCH PINE RAFTER FOOT FIXED WITH 2 No 3" GALV. STEEL NAILS TO TOPSIDE OF RAFTER (TYPICAL)

36 GALV. STEEL HURRICANE CLIPS @ 16" O/C CLIPS TO BE FASTEN TO RAFTER AND WALL PLATE WITH 1" GALV. STEEL NAILS 8 No TO EACH CLIP.

37 3"X 4"X 20'-0" WOL. PITCH PINE WALLPLATE FIXED TO CONCRETE BELT W/ 1/2" DIA. GALV. STEEL ANCHOR BOLTS @ 4'-0" O/C

38 1" X 12" WOL. PITCH PINE RIDGE BOARD 20'- 0" LONG

39 1" X 12" WOL. PITCH PINE CRIPPLE BOARD 8'- 0" LONG

DIVISION 12 – FURNISHINGS
12496 WINDOW TREATMENT HARDWARE

DIVISION 13 – SPECIAL CONSTRUCTION

DIVISION 14 – CONVEYING SYSTEMS

DIVISION 15 – MECHANICAL
15055 COMMON PIPING REQUIREMENTS
15080 MECHANICAL INSULATION
15140 DOMESTIC WATER PIPING
15150 SANITARY WASTE AND VENT PIPING
15410 PLUMBING FIXTURES
15425 PLUMBING SPECIALTIES
15480 DOMESTIC WATER HEATERS

DIVISION 16 – ELECTRICAL
16100 WIRING METHODS
16140 WIRING DEVICES
16410 ENCLOSED SWITCHES AND CIRCUIT BREAKERS
16420 MOTOR CONTROLLERS
16442 PANELBOARDS
16500 LIGHTING
16715 TELEPHONE SERVICE AND DISTRIBUTION

GENERAL NOTES

CONTRACTOR TO CHECK AND VERIFY ALL LEVELS, DATUMS AND DIMENSIONS ON SITE AND SHALL REPORT ANY DISCREPANCIES OR OMISSIONS TO THIS OFFICE PRIOR TO START OF WORK & DURING THE CONSTRUCTION PHASE

THIS DRAWING IS TO BE READ AND UNDERSTOOD IN CONJUNCTION WITH STRUCTURAL, MECHANICAL, ELECTRICAL AND / OR ANY OTHER CONSULTANT/'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO START OF WORK & IT'S EXECUTION

DIVISION 1 – GENERAL REQUIREMENTS
01100 SUMMARY
01200 PRICE & PAYMENT PROCEDURES
01300 ADMINISTRATIVE REQUIREMENTS
01400 QUALITY REQUIREMENTS
01500 TEMPORARY FACILITIES AND CONTROLS
01600 PRODUCT REQUIREMENTS
01700 EXECUTION REQUIREMENTS
01732 SELECTIVE DEMOLITION

DIVISION 2 – SITE CONSTRUCTION
02230 SITE CLEARING
02300 EARTHWORK
02361 TERMITE CONTROL
02510 WATER DISTRIBUTION
02621 FOUNDATION DRAINAGE PIPING
02920 LAWNS AND GRASSES
02930 EXTERIOR PLANTS

DIVISION 3 – CONCRETE
03300 CAST-IN-PLACE CONCRETE

DIVISION 4 – MASONRY
04810 UNIT MASONRY ASSEMBLIES

DIVISION 5 – METALS
05120 STRUCTURAL STEEL

DIVISION 6 – WOOD AND PLASTICS
06100 ROUGH CARPENTRY
06105 MISCELLANEOUS CARPENTRY
06200 FINISH CARPENTRY

DIVISION 7 – THERMAL AND MOISTURE PROTECTION
07115 BITUMINOUS DAMP PROOFING
07920 JOINT SEALANTS

DIVISION 8 – DOORS AND WINDOWS
08163 SLIDING ALUMINUM-FRAMED GLASS DOORS
08212 STILE AND RAIL WOOD DOORS
08310 ACCESS DOORS AND PANELS
08520 ALUMINUM WINDOWS
08800 GLAZING

DIVISION 9 – FINISHES
09210 GYPSUM PLASTER
09220 PORTLAND CEMENT PLASTER
09310 CERAMIC TILE
09910 PAINTING

DIVISION 10 – SPECIALTIES
10801 TOILET AND BATH ACCESSORIES

DIVISION 11 – EQUIPMENT

No.	REVISION / ISSUE	DATE

D&A
DEMELLO & ASSOCIATES
Architectural Design Division
BERMUDA
BRAZIL

TITLE
FLOOR PLAN
ELECTRICAL
PLAN & ROOF
FRAMING

PROJECT NAME
PROPOSED ADDITIONS
PHILLPOTT'S HILL
SANDYS

SCALE: AS SHOWN
DATE: 16 – DEC – 1999
DWG. BY: DANIEL
CHK. BY: DE MELLO
DWG. No.: A002
JOB No.: PLN: 0000/00
PROJECT: 100036